



WOVEN WIRE FENCE

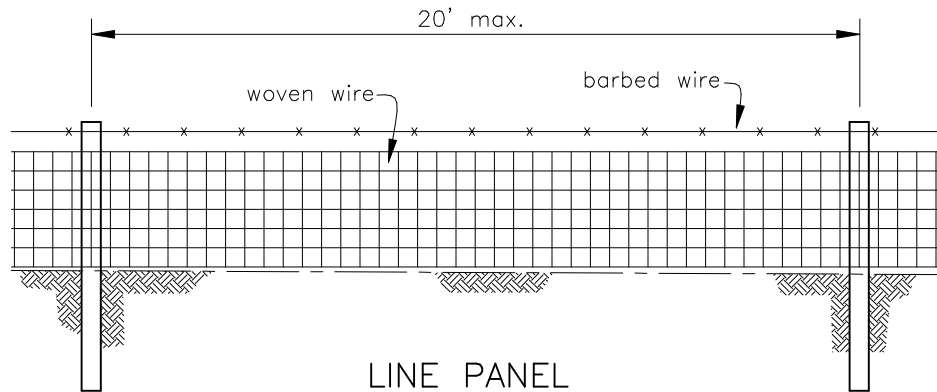

LINE PANEL

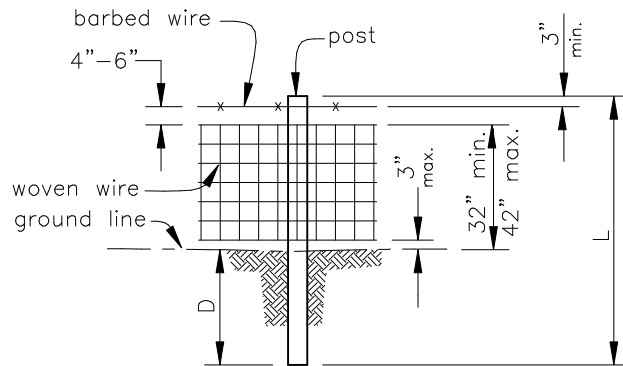

WOVEN WIRE W/ONE BARB DETAIL

WOVEN WIRE

Top and bottom wires shall be 10 gauge or heavier and line and stay wires shall be 12 1/2 gauge or heavier.

There will be a minimum of 6 horizontal wires with a max. of 12 inch spacing between stay wires.

The label shall indicate the wire meets ASTM A-116 or ASTM A-584 standards.

LINE	Wood:	L = 7 ft. min. D = 2.5 ft. min. Dia. = 3 in. min.	Steel:	L = 6 ft. min. D = 22 in. min. Standard "T" or "U"; ≥ 1.25 lbs/ft of length
CORNER OR GATE	Wood:	L = 7 ft. min. D = 3 ft. min. Dia. = 6 in. min.	Steel:	L = 7 ft. min. D = 3 ft. min. (set in conc.) Dia. = Round 2-3/8 in. O.D. or Angle iron 2-1/2 x 2-1/2 x 1/4 (in.)
STAYS	Wood:	1-1/2 in. dia. min.		
	Fiberglass:	Any manufactured for this purpose		
	Wire:	9 1/2 gauge, zinc coated		

SPECIES for all wood: _____

SPECIAL INSTRUCTIONS

Drawing not to scale. Standardized drawing must be adapted to the specific site.

U.S.D.A. NATURAL RESOURCES CONSERVATION SERVICE	JOB CLASS	Date
	CAD FILE NO. LSK-0020.DWG	Designed _____
	SHEET OF	Drawn _____
		Checked _____
		Approved _____